



G-FORCE

FIRE SERVICES

EMERGENCY LIGHT



Fixed Fire Fighting Installation / A.M.C • Detection System / Event & Exhibition • Consultancy In Fire Prevention

Head Off : E/11, Shree Ganesh CHS. Ltd, Road No. 8, Gautam Nagar, Behind Akruiti Center Point, MIDC, Andheri (E), Mumbai - 400 093.
Mob.: +91 97693 66499 / 75067 22506 / 98218 86364 • Email : mumbaigforce@gmail.com



SLEEK EXIT/EGRESS EDGELIT LIGHTS

Features and Application






The Exit signage light ensures an orderly and peaceful dispersal of crowd from public places ensuring that exit and escape paths are illuminated in the event of mains power failure.

LED EL/M (S)-TRANSPARENT

Maintained
5 hrs. Backup
IP 20

LED EL/NE (S)-TRANSPARENT

Non-Emergency
Ceiling Touch (Hanging)
IP 20

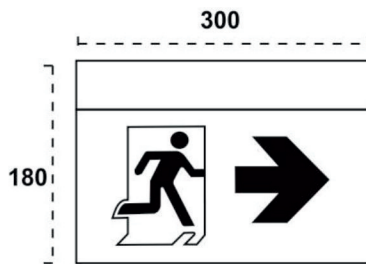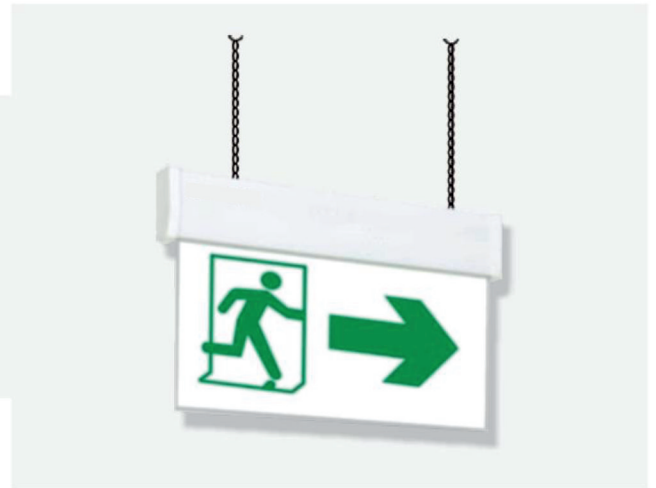

SPECIFICATION

- * Conforms to IS:9583-1981 IS 10322
- * Battery Duration \pm 10%
- * Aluminium Housing Body
- * 22 SWG CRCA Powder Coated Housing
- * Li-on Rechargeable Battery
- * Constant Current Charger
- * 16 to 24 hrs. Recharging Period
- * Input ~ 230 V, 50Hz (others available)
- * Also Available with Higher Backup - POR

Colour of Body Available


	White		Red
	Black		Gold
	Silver		

Please Note:

Accessories shown as a part of installation of a luminary, are optional and shall be procured from us at extra charge.

**SELF CONTAINED
RECHARGEABLE EMERGENCY LIGHTS**



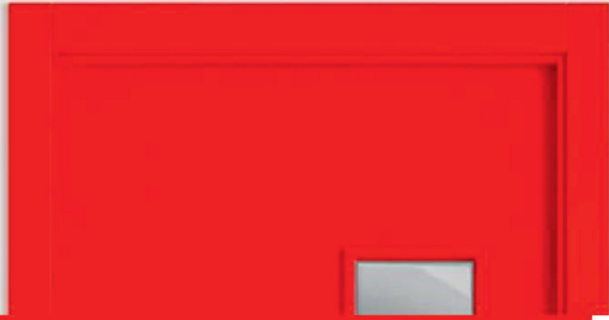


AUDITORIUM SERIES EXIT LIGHTS

Features and Application

The Exit signage light ensures an orderly and peaceful dispersal of crowd from public places ensuring that exit and escape paths are illuminated in the event of mains power failure. It has windows below to illuminate the passage for easy exigency in pitch darkness.

<p>LED EL/M</p> <p>Maintained</p> <p>3 hrs backup</p> <p>IP 20</p>	<p>LED EL/NE</p> <p>Non-Emergency</p> <p>Wall Mount</p> <p>IP 20</p>
---------------------------------------------------------------------------	-----------------------------------------------------------------------------

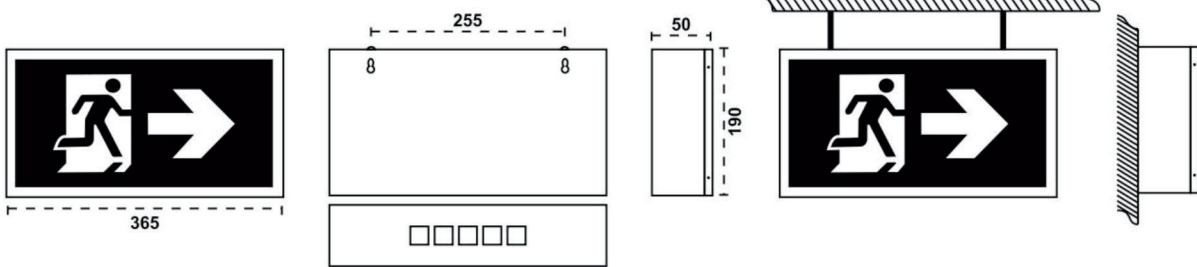

- SPECIFICATION**
- * Conforms to IS: 9583-1981 IS 10322
 - * Battery Duration \pm 10%
 - * 22 SWG CRCA Powder Coated Housing
 - * Ni-Mh/Ni-Cd Rechargeable Battery
 - * Constant Current Charger
 - * 16 to 24 hrs. Recharging Period
 - * I Input ~230 V, 50Hz (others available)
 - * Also Available with Higher Backup POR






















































**SELF CONTAINED
RECHARGEABLE EMERGENCY LIGHTS**



Emergency Exit Lights

Pictogram Customization

Please mention the code numbers of the Pictogram required along with the model number of the EXIT light at the time of placing order

























































			
SF 01	SF 02	SF 03	SF 04
			
SF 05	SF 06	SF 07	SF 08
			
SF 09	SF 10	SF 11	SF 12
			
SF 13	SF 14	SF 15	SF 16
			
SF 17	SF 18	SF 19	SF 20
			
SF 21	SF 22	SF 23	SF 24
			
SF 25	SF 26	SF 27	SF 28
			
SF 29	SF 30	SF 31	SF 32
			
SF 33	SF 34	SF 35	SF 36
			
SF 37	SF 38	SF 39	SF 40
			
SF 41	SF 42	SF 43	SF 44
			
SF 45	SF 46	SF 47	SF 48
			
SF 49	SF 50	SF 51	SF 52
			
SF 53			



Emergency Exit Lights

Pictogram Customization

Please mention the code numbers of the Pictogram required along with the model number of the EXIT light at the time of placing order

			
SF 101	SF 102	SF 103	SF 104
			
SF 105	SF 106	SF 107	SF 108
			
SF 109	SF 110	SF 111	SF 112
			
SF 113	SF 114	SF 115	SF 116
			
SF 117	SF 118	SF 119	SF 120
			
SF 121	SF 122	SF 123	SF 124
			
SF 125	SF 126	SF 127	SF 128
			
SF 129	SF 130	SF 131	SF 132
			
SF 133	SF 134	SF 135	SF 136
			
SF 137	SF 138	SF 139	SF 140
			
SF 141	SF 142	SF 143	SF 144
			
SF 147	SF 148	SF 145	SF 146
			
SF 149	SF 150	SF 151	SF 152
			
SF 153	SF 154	SF 155	SF 156



SELF CONTAINED
BEAM LIGHTS & MULTI LIGHTS
RECHARGEABLE EMERGENCY LIGHTS



- * LED Emergency Lights
- * Robust Housing for Industrial applications
- * Works on Nominal Voltage
- * IP 20 protection
- * Battery Back-up <3 hrs.
- * Surface Mounting
- * Also available in higher Back-up POR

Now Available in
Sturdy & Slight
Models



LED TWIN BEAM MULTI LIGHTS

Features and Application

Multi Lights are built, with swivel facility that allows for shifting the focus whenever required. These Twin beam Multi lights could be embedded or mounted on pillars or poles. They are mostly used in large and sprawling premises, mostly industrial ones such as warehouses, godowns, railway yards and similar areas.

LED ML 2

Non-Maintained

3 hrs backup

2 x 18 Watt LED

IP 20


EXIT

Maintained

3 hrs backup

Wall Mount

IP 20

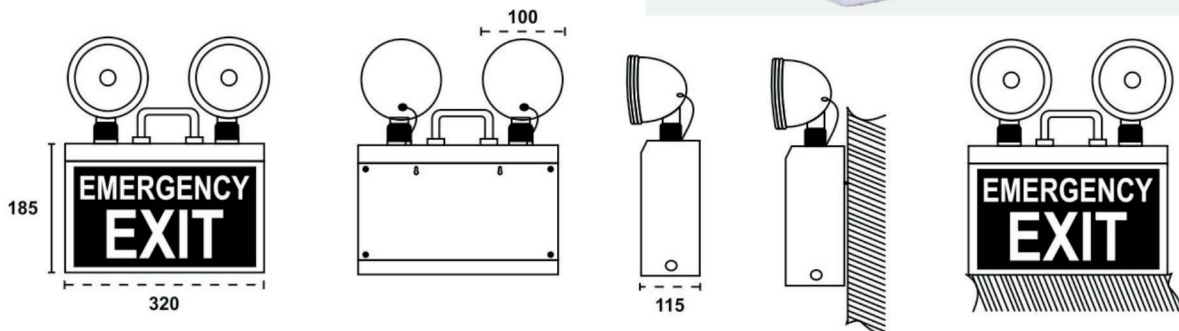

SPECIFICATION

- * Confirms to IS: 9583-1981 IS 10322
- * Battery Duration \pm 10%.
- * Red LED "ON" indicates charging
- * 22 SWG CRCA White Powder Coated Housing
- * SLA Rechargeable Battery
- * Constant Current Charger
- * 10 to 12 hrs. Recharging Period
- * Input ~230 V, 50Hz (others available)
- * Also available with higher backup - POR

**SELF CONTAINED
RECHARGEABLE EMERGENCY LIGHTS**





LED TWIN BEAM MULTI LIGHTS

Features and Application

Multi Lights are built, with swivel facility that allows for shifting the focus whenever required. These Twin beam Multi lights could be embedded or mounted on pillars or poles. They are mostly used in large and sprawling premises, mostly industrial ones such as warehouses, godowns, railway yards and similar areas.

LED ML

Non-Maintained

3 hrs backup

2 x 18 Watt LED

IP 20


EXIT

Maintained

3 hrs backup

Wall Mount

IP 20

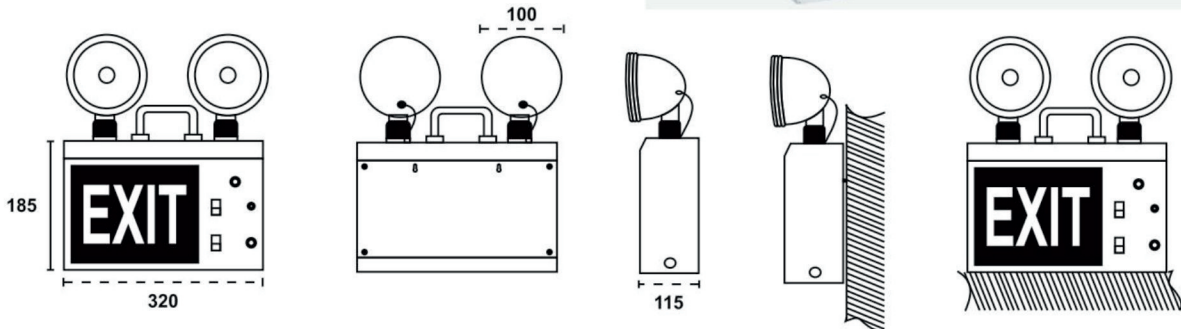

SPECIFICATION

- * Confirms to IS: 9583-1981 IS 10322
- * Battery Duration \pm 10%.
- * Red LED "ON" indicates charging
- * 22 SWG CRCA White Powder Coated Housing
- * SLA Rechargeable Battery
- * Constant Current Charger
- * 10 to 12 hrs. Recharging Period
- * Input ~ 230 V, 50Hz (others available)
- * Also available with higher backup - POR

**SELF CONTAINED
RECHARGEABLE EMERGENCY LIGHTS**



LED TWIN BEAM LIGHTS

Features and Application

Multi Lights are built, with swivel facility that allows for shifting the focus whenever required. These Twin beam Multi lights could be embedded or mounted on pillars or poles. They are mostly used in large and sprawling premises, mostly industrial ones such as warehouses, godowns, railway yards and similar areas.





LED TBL

Non-Maintained

3hrs backup

2 x 18 W LED

IP 20



SPECIFICATION

- * Conforms to 15:9583-1981 19 10322
- * Battery Duration \pm 10%
- * Molded Polycarbonate Body
- * 22 SWG CRCA White Powder Coated Housing
- * SLA Rechargeable Battery
- * Constant Current Charger
- * 10 to 12 hrs. Recharging Period
- * Input ~ 230 V, 50Hz (others available)
- * Also Available with Higher Backup-POR

**SELF CONTAINED
RECHARGEABLE EMERGENCY LIGHTS**



DECORATIVE EXIT/EGRESS LIGHTS.

Features and Application




The Exit signage light ensures an orderly and peaceful dispersal of crowd from public places ensuring that exit and escape paths are illuminated in the event of mains power failure.

LED EL/M (R) W

Maintained
3 hrs. Backup
IP 20

LED EL/NE (R) W

Non-Emergency
Wall Concealed
IP 20



SPECIFICATION

- * Confirms to IS: 9583-1981 IS 10322
- * Battery Duration \pm 10%
- * 22 SWG CRCA White Powder Coated Housing
- * Ni-Mh / Ni-Cd Rechargeable Battery
- * Constant Current Charger
- * 16 to 24 hrs. Recharge Period
- * Input ~ 230V, 50Hz (others available)
- * Also available with higher backup - POR

**SELF CONTAINED
RECHARGEABLE EMERGENCY LIGHTS**

WEATHER PROOF EXIT / EGRESS LIGHTS (IP65)

Features and Application

An attractive rang of special Emergency lighting with ABS white plastic body reeded ABS diffuser and Self Contained Ni-Mh/Ni-Cd Batteries in Maintained/Non-Maintained modes

LED EL M/WP 1

Maintained






2 hrs. Backup

LED

IP 65



Also Available Non-Emergency Model

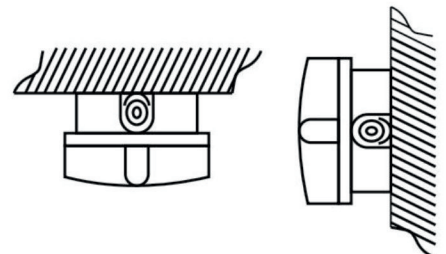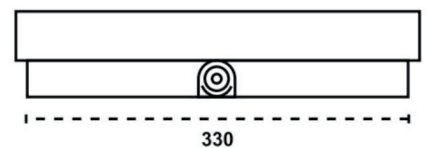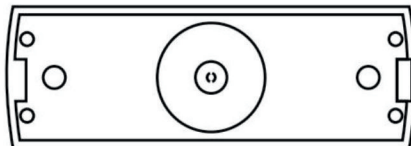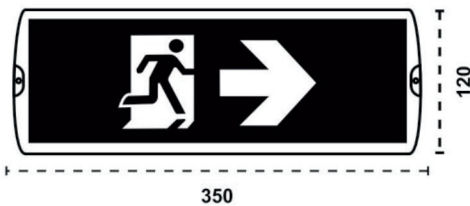

SPECIFICATION

- * Confirms to IS: 9583-1981 IS 10322
- * Battery Duration $\pm 10\%$
- * ABS White Plastic Body
- * Ni-Mh/Ni-Cd Rechargeable Battery
- * Constant Current Charger
- * 16 to 24 hrs. Recharging Period
- * ABS Reeded Diffuser
- * Input~230 V. 50Hz (others available)
- * Also available with higher backup - POR

SELF CONTAINED RECHARGEABLE EMERGENCY LIGHTS





MAINTAINED EMERGENCY LED EXIT LIGHTS (SQUARE)

Features and Application



This is a Maintained Emergency exit light in square shape which provides exit view from all the sides.

LED EL/M (SQUARE)

Maintained
3 hrs. Backup
IP 20

LED EL/NE (SQUARE)

Non-Emergency
Ceiling Mount
IP 20

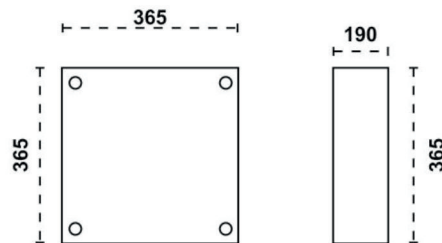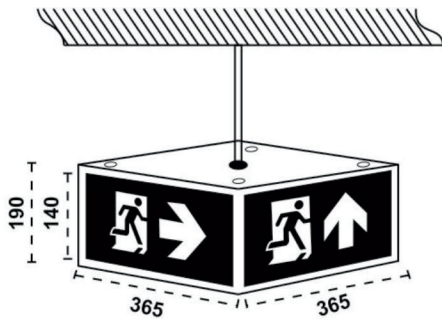

SPECIFICATION

- * Confirms to IS: 9583-1981 IS 10322
- * Battery Duration \pm 10%.
- * Epoxy Polyester White Powder Coated Housing
- * Ni-Mh/Ni-Cd Rechargeable Battery
- * Constant Current Charger
- * 16 to 24 hrs. Recharging Period
- * Input ~230 V, 50Hz (others available)
- * Also available with higher backup - POR

SELF CONTAINED RECHARGEABLE EMERGENCY LIGHTS





LED SLEEK EXIT/EGRESS LIGHTS

Features and Application



The Exit signage light ensures an orderly and peaceful dispersal of crowd from public places ensuring that exit and escape paths are illuminated in the event of mains power failure.

LED EL/M/RM (S) TRANSPARENT

Maintained
3 hrs. Backup
IP 20

LED EL/NE/RM (S) TRANSPARENT

Non-Emergency
Ceiling Mount
IP 20

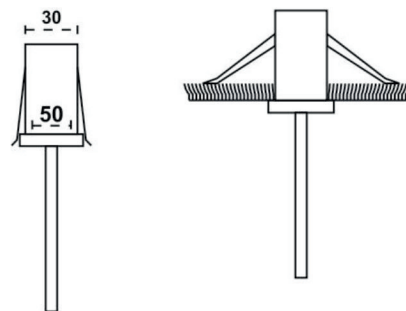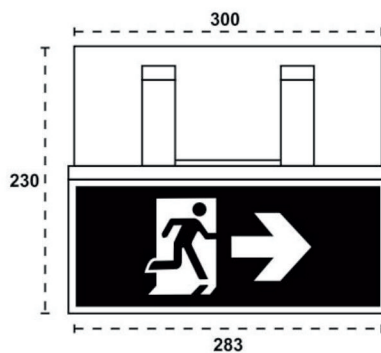

SPECIFICATION

- * Conforms to 15:9583-1981 19 10322
- * Battery Duration \pm 10%
- * Molded Polycarbonate Body
- * Clear Acrylic Diffuser Cum Message Panel
- * Li-on Rechargeable Battery
- * Constant Current Charger
- * 16 to 24 hrs. Recharging Period
- * Input ~ 230 V, 50Hz (others available)
- * Also Available with Higher Backup-POR

**SELF CONTAINED
RECHARGEABLE EMERGENCY LIGHTS**



FLAMEPROOF

Emergency Lights.



Lighting in hazardous environments requires special consideration. Flameproof lights are designed to provide illumination in areas where flammable gases or vapors may be present. In this guide, we'll delve into the specifications of various flameproof lights to help you make informed decisions for your safety-conscious lighting needs.




EMERGENCY FLAME PROOF MULTI LIGHTS (IP 65)

Features and Application

Flame Proof Multi Lights can be used indoors as well as outdoors; Autolite also has this product with an EXIT sign to serve as an 'EXIT' indicator in an emergency situation.

LED ML/FP	EXIT
Non-Maintained	Maintained
3 hrs backup	3 hrs backup
2 x 18 W LED	Wall Mount
IP 65	IP 65

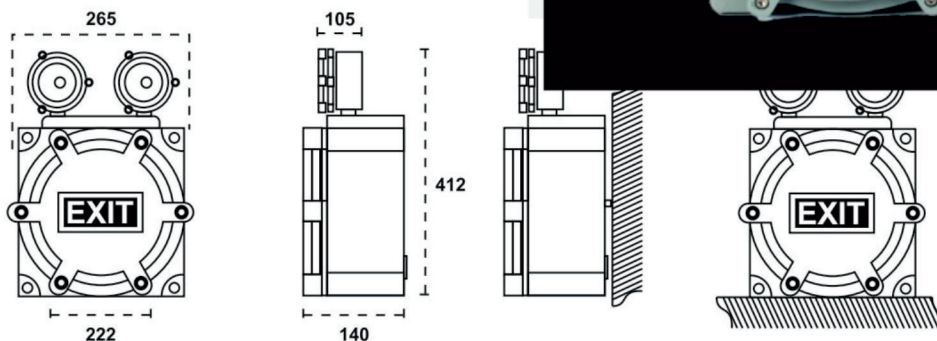

SPECIFICATION

- * Conforms to IS: 9583-1981 IS 10322
- * Battery Duration \pm 10%
- * Red LED "ON" Indicates Charging
- * Housing Cast Aluminium & Epoxy Paint, Shade 631 of IS: 5
- * Heat Resistant Clear Borosil Glass
- * SLA Rechargeable Battery
- * Constant Current Charger
- * 10 to 12 hrs. Recharging Period
- * Input ~ 230 V, 50 Hz (Other Available)
- * Also Available with Higher Backup - POR

TECHNICAL DETAILS

- 1. Type of protection & Gas Group:** Enclosure, Aluminium Alloy LM-6, Flame Proof (Explosion Proof) Ex-d as per IS: 2148/1981 & 15:13346/1992.
- 2. Area Classification:** Zone 1 & 2, Gas Group IIA & IIB.

**SELF CONTAINED
RECHARGEABLE EMERGENCY LIGHTS**



EMERGENCY FLAME PROOF TWIN BEAM LIGHTS (IP 65)

Features and Application

Flame Proof Twin Beam Light can be used indoors as well as outdoors; model LED for high risk areas like power plants, metros, major chemical industries, firecracker units; approved by CMRI.


LED TBL (FP)

Non-Maintained

3 hrs backup

2 x 18 Watt

IP 65

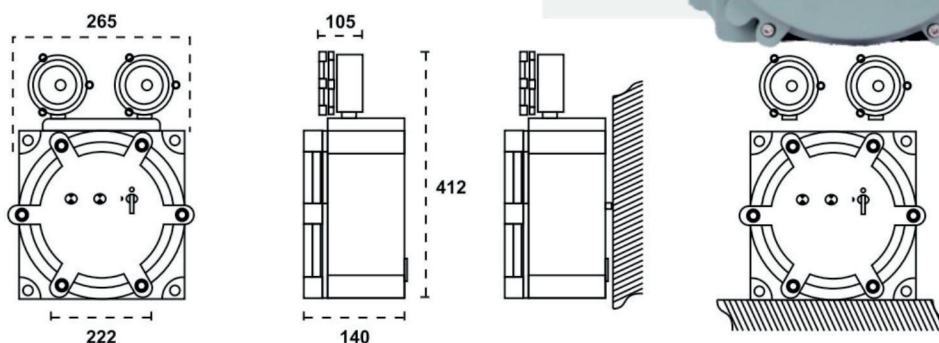

SPECIFICATION

- * Conforms to IS: 9583-1981 IS 10322
- * Battery Duration \pm 10%
- * Red LED "ON" Indicates Charging
- * Housing Cast Aluminium & Epoxy Paint, Shade 631 of IS: 5
- * SLA Rechargeable Battery
- * Constant Current Charger
- * 10 to 12 hrs. Recharging Period
- * Input~230 V, 50 Hz (Other Available)
- * Also Available with Higher Backup - POR

TECHNICAL DETAILS

1. **Type of protection & Gas Group:** Enclosure, Aluminium Alloy LM-6, Flame Proof (Explosion Proof) Ex-d as per IS: 2148/1981 & 15:13346/1992.
2. **Area Classification:** Zone 1 & 2, Gas Group IIA & IIB.

**SELF CONTAINED
RECHARGEABLE EMERGENCY LIGHTS**

EMERGENCY FLAME PROOF EXIT / EGRESS LIGHTS (IP 65)

Features and Application



An attractive range of Emergency Flame Proof Exit / Egress Lights approved by CMRI in aluminium and with Self Contained Ni-Mh/Ni-Cd Batteries in Non-Maintained and Maintained modes.

LED EL/M/FP (W)

Maintained
2 hrs backup
5 Watt LED
IP 65

LED EL/NE/FP (W)

Non-Emergency
Wall Mount
5 Watt LED
IP 65

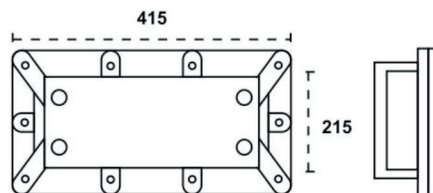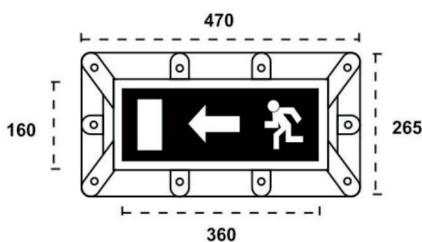

SPECIFICATION

- * Conforms to IS: 9583-1981 IS 10322
- * Battery Duration \pm 10%
- * Red LED "ON" Indicates Charging
- * Housing Cast Aluminium & Epoxy Paint, Shade 631 of IS: 5
- * CMRI Certified Housing
- * Heat Resistant Clear Borosil Glass
- * Ni-Mh/Ni-Cd Rechargeable Battery
- * Constant Current Charger
- * 16 to 24 hrs. Recharging Period
- * Input~230 V, 50 Hz (Other Available)
- * Also Available with Higher Backup - POR

TECHNICAL DETAILS

- 1. Type of protection & Gas Group:** Ex-d as per IS: 2148/1981 & IP 65 as per IS 2147 / 1962. Enclosure, Suitable for Div 1. Gas Group I, IIA & IIB as per IS : 2148 / 1981 or Div 1, Class 1-D & Class 1-C as per NEC 70 -1981 of USA or Class 1 & Class 2 As per VDE 0171 of FRG
- 2. Area Classification:** Group-Z

**SELF CONTAINED
 RECHARGEABLE EMERGENCY LIGHTS**




EMERGENCY FIRE EQUIPMENT LIGHTS

Features and Application

One of the most essential mode for Escape lighting recommended by National Building Code of India (NBC, to used near each fire alarm Call point, fire fighting equipment, etc.

LED FE/WL/M 1 (CURVED)

Maintained
2 hrs. backup
10 W LED
IP 20

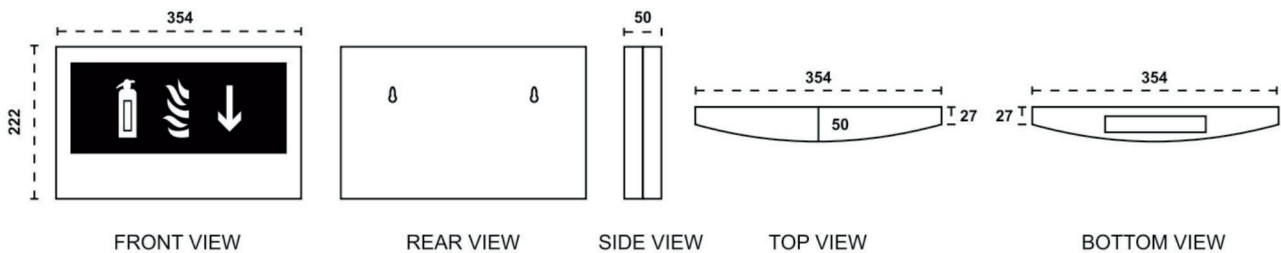

SPECIFICATION

- * Confirms to IS: 9583-1981 IS 10322
- * Battery Duration \pm 10%
- * Red LED "ON" indicated charging
- * 22 SWG CRCA White Powder Coated Housing
- * Ni-Mh / Ni-Cd Rechargeable Battery
- * Constant Current Charger
- * 16 to 24 hrs. Recharge Period
- * Input \sim 230V, 50Hz (others available)
- * Also available with higher backup - POR

FASCIA OPTIONS:



FIRE EQUIPMENT LIGHTS
Fire Equipment Lights
Manufactured AS per NBC 2016 volume 1
Chapter 3. Section 3.4.7.1 (h)

**SELF CONTAINED
RECHARGEABLE EMERGENCY LIGHTS**



EMERGENCY FIRE EQUIPMENT LIGHTS

Features and Application

One of the most essential mode for Escape lighting recommended by National BuildingCode of India (NBC, to used near each fire alarm Call point, fire fighting equipment, etc.

LED FE/WL/M 1 (SMALL)

Maintained
2 hrs. backup
10 W LED
IP 20

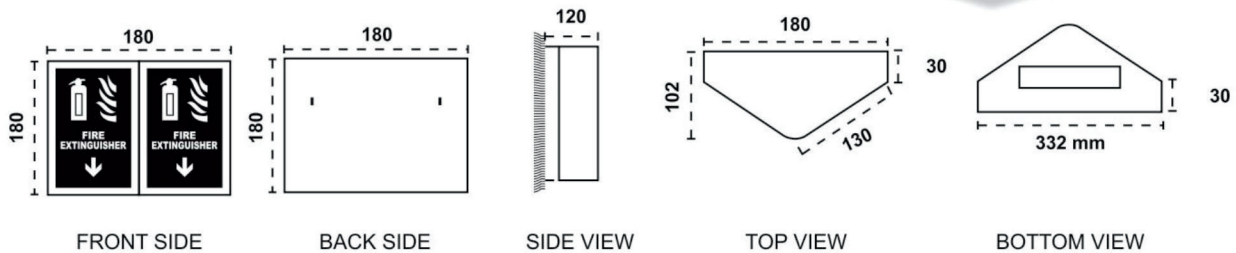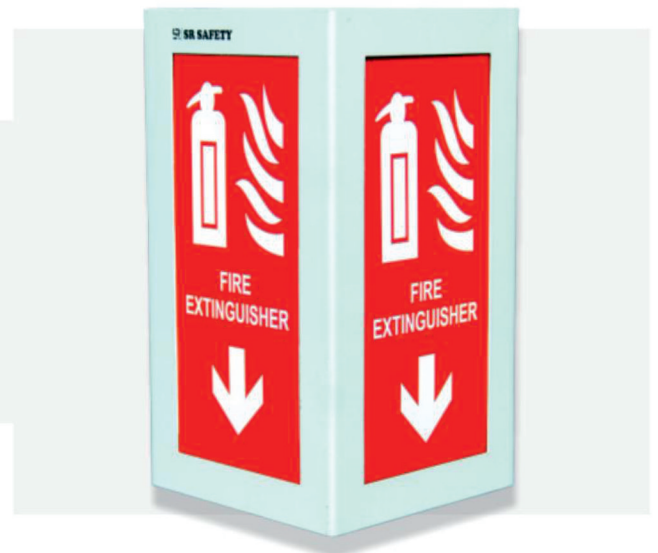

SPECIFICATION

- * Confirms to IS: 9583-1981 IS 10322
- * Battery Duration $\pm 10\%$
- * Red LED "ON" indicated charging
- * 22 SWG CRCA White Powder Coated Housing
- * Ni-Mh / Ni-Cd Rechargeable Battery
- * Constant Current Charger
- * 16 to 24 hrs. Recharge Period
- * Input $\sim 230V, 50Hz$ (others available)
- * Also available with higher backup - POR

FASCIA OPTIONS:



FIRE EQUIPMENT LIGHTS
Fire Equipment Lights
Manufactured AS per NBC 2016 volume 1
Chapter 3. Section 3.4.7.1 (h)

**SELF CONTAINED
RECHARGEABLE EMERGENCY LIGHTS**






EMERGENCY FIRE EQUIPMENT LIGHTS

Features and Application

One of the most essential mode for Escape lighting recommended by National Building Code of India (NBC, to used near each fire alarm Call point, fire fighting equipment, etc.

LED FE/WL/M 2 (LARGE)

- Maintained
- 2 hrs. backup
- 10 W LED
- IP 20

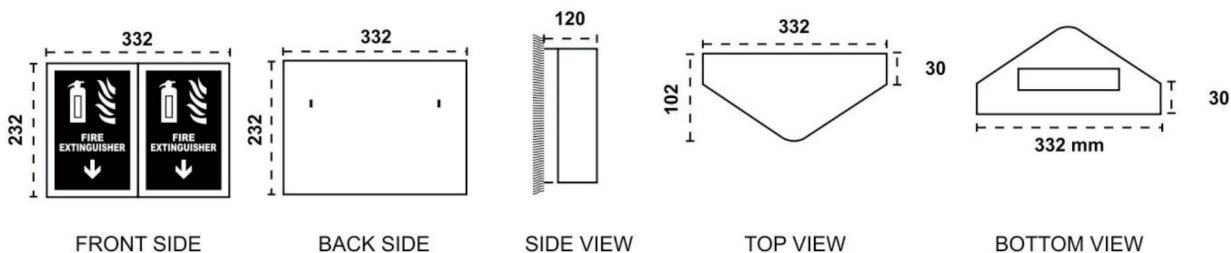

SPECIFICATION

- * Confirms to IS: 9583-1981 IS 10322
- * Battery Duration \pm 10%
- * Red LED "ON" indicated charging
- * 22 SWG CRCA White Powder Coated Housing
- * Ni-Mh / Ni-Cd Rechargeable Battery
- * Constant Current Charger
- * 16 to 24 hrs. Recharge Period
- * Input \sim 230V, 50Hz (others available)
- * Also available with higher backup - POR

FASCIA OPTIONS:



FIRE EQUIPMENT LIGHTS
Fire Equipment Lights
Manufactured AS per NBC 2016 volume 1
Chapter 3. Section 3.4.7.1 (h)

**SELF CONTAINED
RECHARGEABLE EMERGENCY LIGHTS**

